



# NON-WELDED CYLINDER DATA SHEET


DONE BY	<i>Alfata</i>	02/97
CHECKED BY		08/08
APPROVED BY		08/08

DATA SHEET Nr.

DATE

**INTRODUCTION**

Steel (Cr-Mo) Non-welded cylinders for compressed, liquid or pressure-dissolved gases.

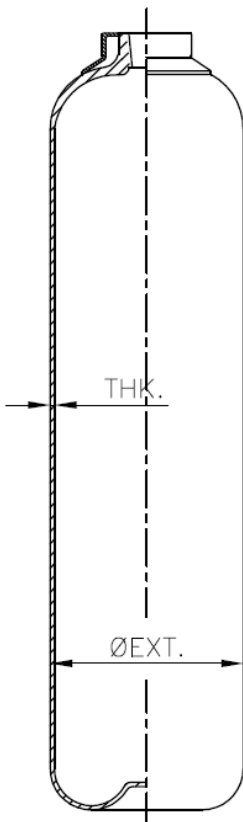

### TECHNICAL DATA

PART NUM.	CAPACITY	Ø EXT. ±1%	THREADS	HYDRAULIC TEST
10050060	5 l. 0.17 ft. <sup>3</sup>	140 mm. 5.5 in.	1" NPT-NGT	250 bar. 3625 psi.
10130060	13.4 l. 0.47 ft. <sup>3</sup>	140 mm. 5.5 in.		
10260060	26.8 l. 0.94 ft. <sup>3</sup>	229 mm. 9.0 in.		
10400080	40.2 l. 1.42 ft. <sup>3</sup>	229 mm. 9.0 in.	R. 1½" ISO 228	
10670080	67.0 l. 2.36 ft. <sup>3</sup>	267 mm. 10.5 in.	1" NPT-NGT	
10050060	67.5 l. 2.37 ft. <sup>3</sup>	267 mm. 10.5 in.		
10750100	75 l. 2.64 ft. <sup>3</sup>	267 mm. 10.5 in.	2½" 12UN 2A 60°◁	
10050060	80 l. 2.82 ft. <sup>3</sup>	267 mm. 10.5 in.	1" NPT - NGT	300 bar/450 bar 4351psi/6527psi

MATERIAL:                      **Steel**                      34CrMo4

Transportable Pressure Equipment Directive 99/36/EC  
AS 2030.1

**IMPORTANT**

*LPG Fire reserves the right to change or modify without prior notice any data or specifications due to changes or modifications made in order to improve the products presented. This data sheet details the standards and requirements of LPG Fire. It is for informational purposes only and the data contained within is approximate and presented without legal guarantee or warranty. The observation or use of this document doesn't exclude the obligation to comply with existing local standards and authorities at all times. For maintenance and installations please refer to the manual supplied with the product.*

**Contact Us:**

LPG Fire Australia  
8/30 Mudgeeraba Rd  
Worongary  
QLD 4213 AUSTRALIA  
Phone: +61 7 5559 0634  
Fax: +61 7 5559 0201  
Email: info@lpgfire.com.au  
Web: www.lpgfire.com.au